


## Invisible fastening.

### Spacer FTA-ISW / -ISA – The standard solution for the invisible fixation of grooved boards


Item	Art. No.	Description	Sales unit [pcs]
FTA-ISW 9 mm	539875	For Wood support rail with stainless steel screws C1 black 5 x 50 mm	30
FTA-ISA 9 mm	539876	For Aluminium support rail with stainless steel drilling screws C1 black 4,8 x 35 mm	30

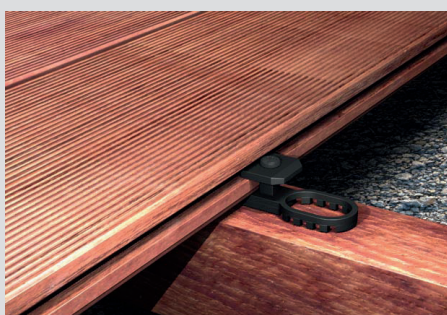

The spacer FTA-ISW / -ISA is suitable for boards with a groove wall thickness of 5.5 – 11.5 mm and a minimum groove depth of 9 mm. Boards can be installed quick and professionally with an invisible fastening.

#### ADVANTAGES AT A GLANCE

- Wood protection built right in, because of ventilation under the boards.
- Uniform installation pattern. Distance between the boards is 9 mm.
- Readjustment or replacement of single beams is possible at any time.
- Without pre-drilling.

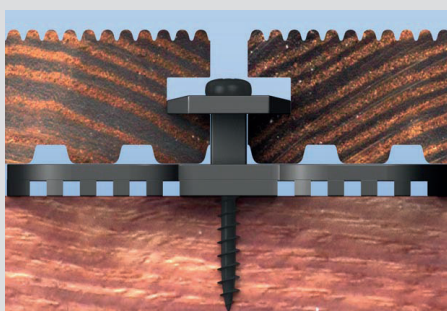

A predetermined breaking point that permits a flexible clamping range of 6 mm, enables alignment to various groove wall thicknesses. About 15 – 20 pieces are needed per m<sup>2</sup>, depending on board width.



*Invisible installation and only one screw per fastening / fixing point.*

