


## Invisible fastening and support pads.

### Start- and end fastening system FTA-ISW / -ISA Start – For grooved boards

| Item          | Art. No. | Description  | Sales unit [pcs] |
|---------------|----------|--|------------------|
| FTA-ISW Start | 539877   | For Wood support rail with stainless steel screws A4 4 x 35 mm                 | 20               |
| FTA-ISA Start | 539878   | For Aluminium support rail with stainless steel drilling screws A4 4,2 x 19 mm | 20               |

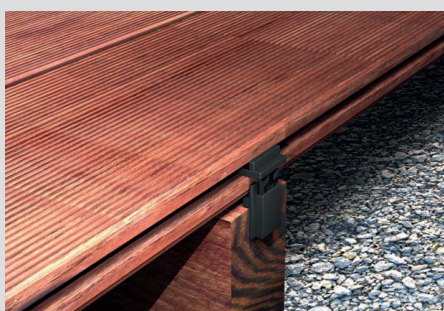

The start and end fixation FTA-ISW / -ISA Start ensures invisible and clean fastening of grooved boards at the start and end of the completed decking. For all boards with central grooves of 4 mm or wider (mind. 9 mm deep).

#### ADVANTAGES AT A GLANCE

- No visible screw fastening.
- Ideal supplement for the installation of decking boards with fischer spacer FTA-ISW / -ISA.



### Adjustable decking pedestals FTA-UF – For continuous height adjustment

| Item               | Art. No. | Description                     | Sales unit [pcs] |
|--------------------|----------|---------------------------------|------------------|
| FTA-UF 25 – 40 mm  | 539881   | Height compensation 25 – 40 mm  | 1                |
| FTA-UF 35 – 70 mm  | 539882   | Height compensation 35 – 70 mm  | 1                |
| FTA-UF 65 – 155 mm | 539883   | Height compensation 65 – 155 mm | 1                |



With the decking pedestals FTA-UF the easy and continuous height adjustment is done by simply turning to the right or left (even once installed). The adjustable pedestals provide secure support for the entire structure by adjusting the support rail for gradients which can easily be achieved. You will need approximately 3.5 – 5 decking pads per square meter.

#### ADVANTAGES AT A GLANCE

- Continuous height adjustment.
- Adjustable part levels out gradients of up to 8%.
- High load capacity and weather resistance.
- Compression resistant substrates, instead of a foundation.
- Invisible under the boards.

