


fischer Aircrete anchor GB GREEN. Secure in aerated concrete.

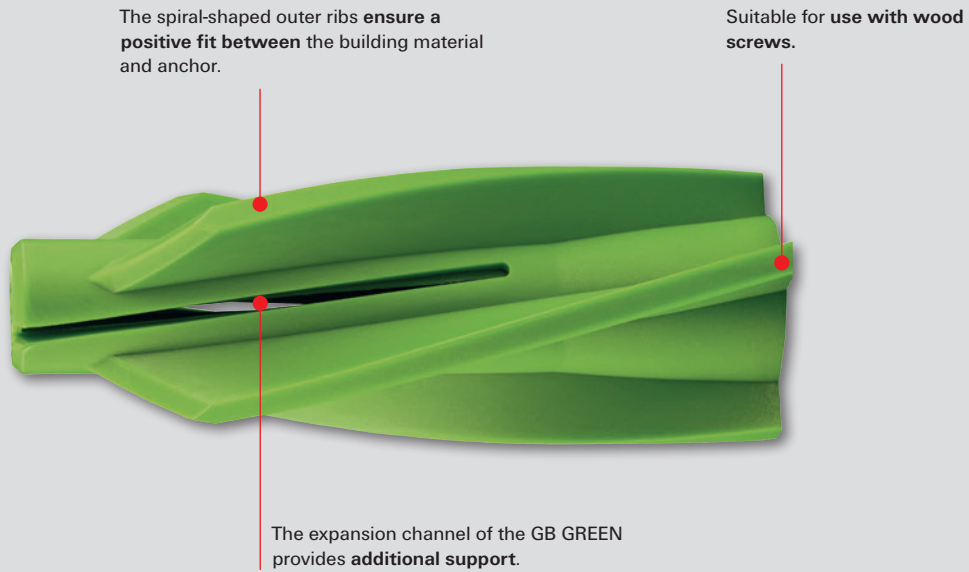


Functioning.

- The Aircrete anchor GB GREEN is suitable for pre-positioned installation.
- The spiral-shaped outer ribs cut a positive fit into the soft building material when knocked in, ensuring the best pressure distribution and load-bearing capacity.
- Can be used in unplastered aerated concrete.

Your advantages at a glance:

- The spiral-shaped outer ribs cut a positive fit into the building material ensuring a secure hold.
- Can be applied with a hammer - there is no need for special tools, thus saving time and money during installation.
- The GB GREEN is available in sizes 8 and 10.

Installation

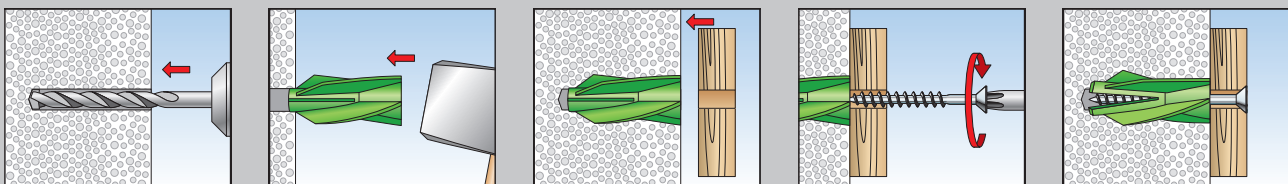


Applications.

Официальный поставщик fischer-market.ru

Test mark



Recommendation



Suitable for:

- Aerated concrete with compressive strength 2 to 4 N/mm²
- Aerated concrete wall and ceiling boards with compressive strength 3.3 to 4.4 N/mm²

Typical anchoring solutions

Radiators



Pipes



- The aerated concrete anchor GB GREEN provides a secure hold in unplastered walls and ceiling boards made from aerated concrete.
- Typical applications are mounting suspended ceilings, cable routes, pipelines, façades and roof structures, canopy consoles and much more.

Suspended ceilings



Cable routes




Range.

Официальный поставщик fischer-market.ru



Aircrete anchor GB GREEN




GB GREEN

Item	Art. no.	Nominal drill bit diameter d_0 [mm]	Min. drill hole depth h_1 [mm]	Plug length = min. anchoring depth $l = h_{ef}$ [mm]	fischer safety screw d_s [mm]	Sales unit [pcs]
GB GREEN 8	524870	8	60	50	5	20
GB GREEN 10	524871	10	65	55	7	18

greenline - aircrete anchor GB GREEN



Type	Art.-No.	GTIN (EAN Code)	Outer carton	Content	Colour code
	532734	4048962218497	10	4x aircrete anchor GB GREEN 8	yellow

Официальный поставщик fischer-market.ru